




C802-3

8 × 2 CHARACTERS

DIMENSION:

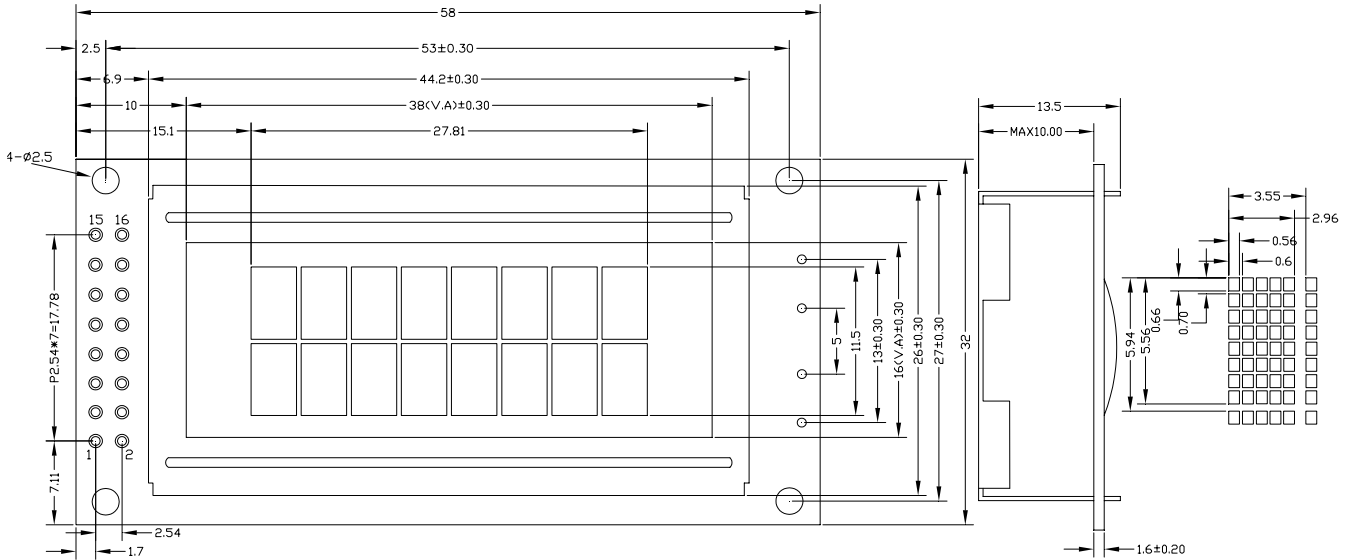

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	A	K


FEATURE:

1. Display mode :STN, Positive
2. Dot/Background Color : Yellow-green
3. Display format : 8Char×2Line
4. Input data : 4/8 bit I/O
5. Driving method : 1/8Duty 1/5 Bias
6. Viewing direction : 12 O'clock
7. Back light : LED Backlight

ELECTRICAL CHARACTERISTIC:

Item	Symbol	Standard value			Unit
		Min	Typ	Max	
Power supply for logic	VDD	-0.3	-	7	V
Power supply for LCD	V _{LCD}	VDD-12	-	VDD+0.3	V
Input voltage	V _{in}	-0.3	-	VDD+0.3	V
Operating temperature	Top	-20	-	+80	
Storage temperature	T _{stg}	-30	-	+80	

BLOCK DIAGRAM:

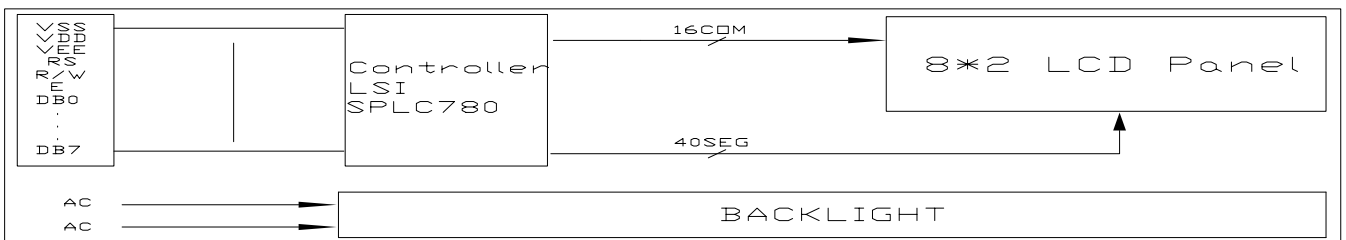

DISPLAY CHARACTER ADDRESS CODE:

Display position	1	2	3	4	7	8
DD RAM address	00	01	02	03	06	07
	40	41	42	43	46	47