QX103

DIMENSION:

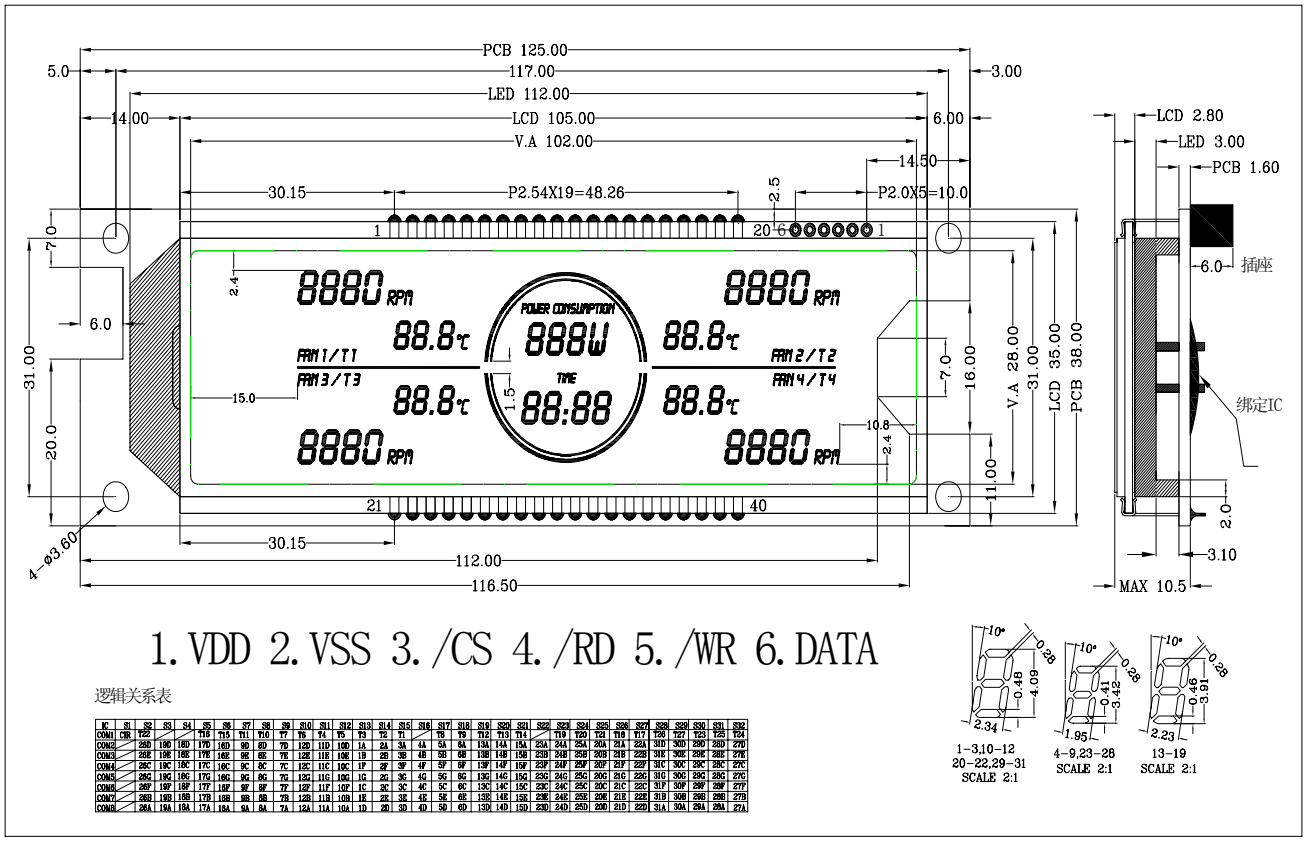

1. VDD 2. VSS 3. /CS 4. /RD 5. /WR 6. DATA

逻辑关系表

IC	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	S13	S14	S15	S16	S17	S18	S19	S20	S21	S22	S23	S24	S25	S26	S27	S28	S29	S30	S31	S32
COM1	CMB	T22			T16	T15	T11	T10	T7	T6	T4	T5	T3	T2	T1		T8	T9	T12	T13	T14		T19	T20	T21	T18	T17	T26	T27	T23	T25	T24
COM2		29D	19D	18D	17D	16D	9D	8D	7D	12D	11D	10D	1A	2A	3A	4A	5A	6A	13A	14A	15A	23A	24A	25A	20A	21A	22A	31D	30D	29D	28D	27D
COM3		29E	19E	18E	17E	16E	9E	8E	7E	12E	11E	10E	1B	2B	3B	4B	5B	6B	13B	14B	15B	23B	24B	25B	20B	21B	22B	31E	30E	29E	28E	27E
COM4		29C	19C	18C	17C	16C	9C	8C	7C	12C	11C	10C	1F	2F	3F	4F	5F	6F	13F	14F	15F	23F	24F	25F	20F	21F	22F	31C	30C	29C	28C	27C
COM5		29G	19G	18G	17G	16G	9G	8G	7G	12G	11G	10G	1G	2G	3G	4G	5G	6G	13G	14G	15G	23G	24G	25G	20G	21G	22G	31G	30G	29G	28G	27G
COM6		29F	19F	18F	17F	16F	9F	8F	7F	12F	11F	10F	1C	2C	3C	4C	5C	6C	13C	14C	15C	23C	24C	25C	20C	21C	22C	31F	30F	29F	28F	27F
COM7		28D	18D	18D	17D	16D	9B	8B	7B	12B	11B	10B	1E	2E	3E	4E	5E	6E	13E	14E	15E	23E	24E	25E	20E	21E	22E	31B	30B	29B	28B	27B
COM8		28A	18A	18A	17A	16A	9A	8A	7A	12A	11A	10A	1D	2D	3D	4D	5D	6D	13D	14D	15D	23D	24D	25D	20D	21D	22D	31A	30A	29A	28A	27A

FEATURE:

1.DISPLAY TYPE : TN,FSTN，NAGATIVE
2.VIEWING DIRECTION:12 O`CLOCK
3. OPERATING VOLTAGE:5.0V
4. POLARIZER MODE:TRANSMISSIVE
5. DRIVER IC:SL3208
6. DRIVE METHOD:1/8DUTY 1/3BIAS
7.OPERATING TEMP:-30C~85C
8.STORAGE TEMP:-40C~100C
9.ROHS:符合 ROHS 要求

ELECTRICAL CHARACTERISTIC:

Item	Symbol	Standard value			Uin
		Min	Typ	Max	t
Power supply for logic	VDD-VSS	-0.3	—	5.5	V
Input voltage	Vin	VSS-.0.3	—	VDD+0.3	V
Operating temperature	Top	-30	—	85	℃
Storage temperature	Tstg	-40	—	100	℃
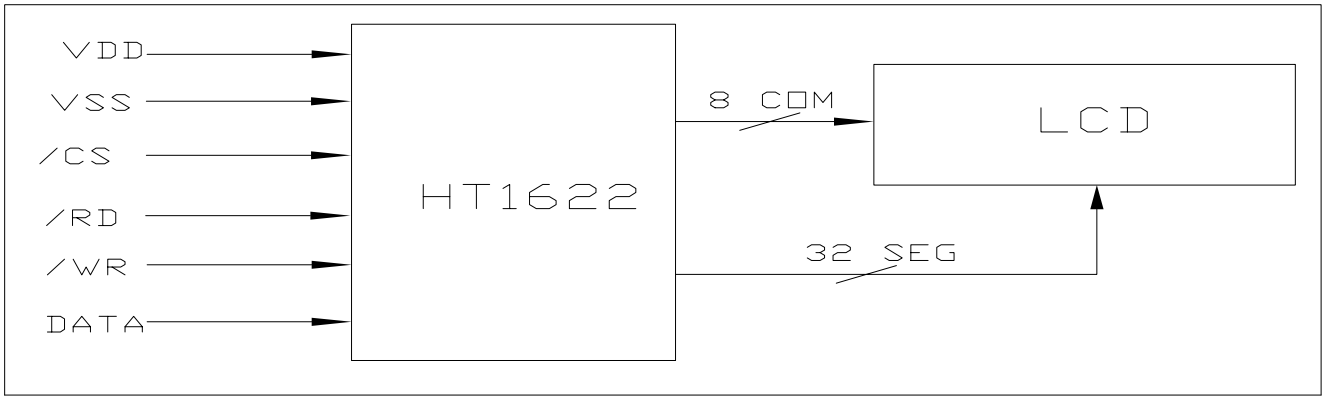
BLOCK DIAGRAM: