
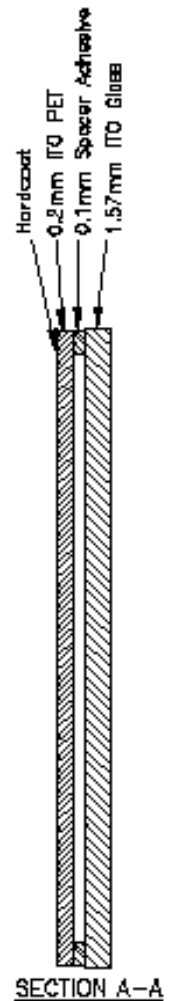
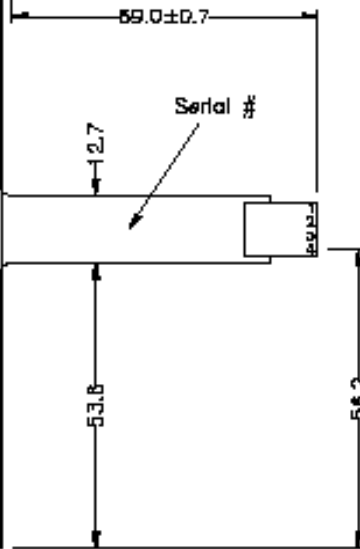


FRONT VIEW

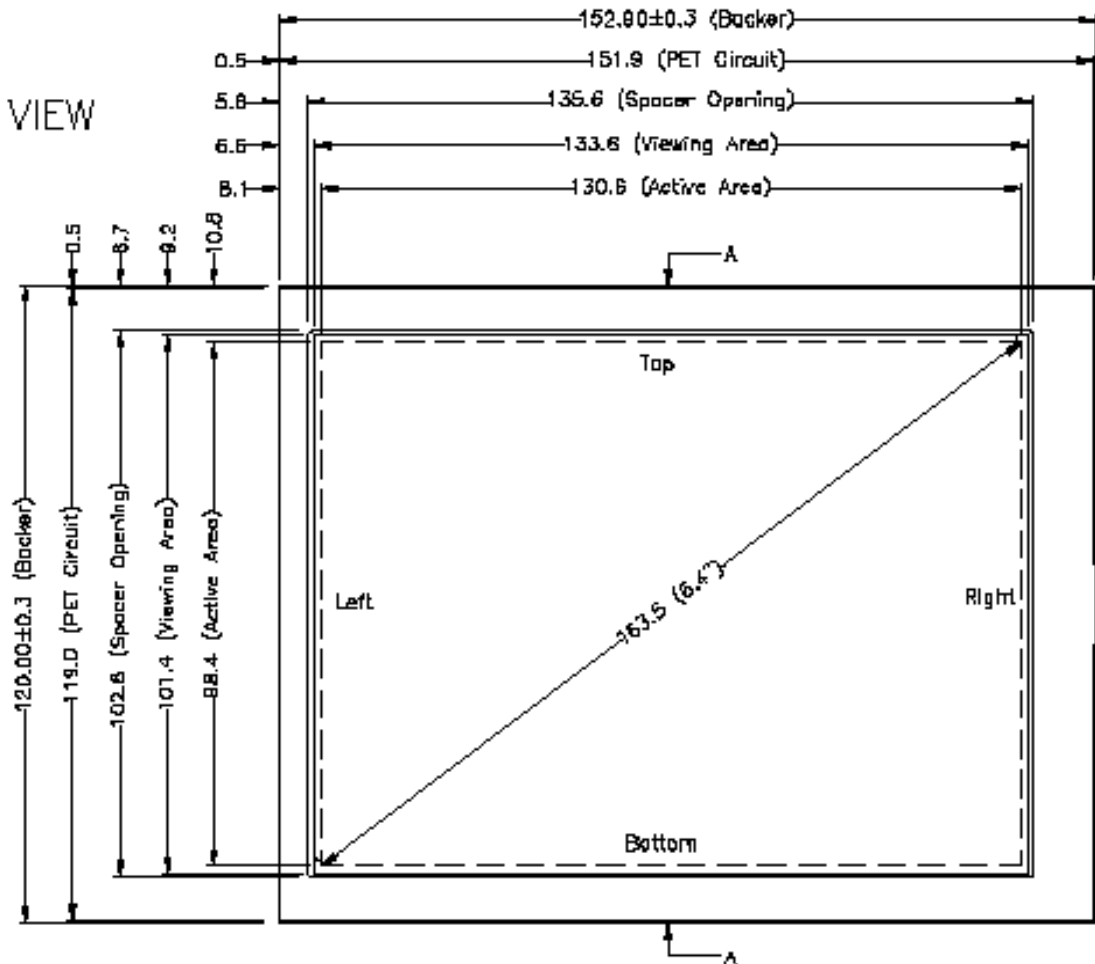

NOTES:

1. ITO GLASS THICKNESS : 1.57mm
2. ITO PET CIRCUIT THICKNESS : 0.2mm
3. SPACER ADHESIVE : 0.1mm
4. OVERALL THICKNESS : 1.87mm ±0.07
5. CONNECTOR AND PINOUT AS INDICATED
6. FRONT SURFACE ANTI-GLARE HARDCOAT
7. OPTICAL SPECIFICATION : A001
8. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.5mm

Pin #	Assignment
1	Right
2	Left
3	Top
4	Bottom

A	REV. NO.	DATE	DESCRIPTION	CHK.
REVISION				
DRG. OF DESIG.	APPROVED		TOLERANCES UNLESS SPECIFIED	
ENGINEER	PROJECT MGR.		X	± 0.50
DRAWN BY: Aloc	DATE: APR. 12, 2001	XXX	JXX	± 0.25
SHT 1 OF 1	REV. A	XXX	XXX	± 0.10
		ANGULAR		

CLEAR-VICTORY TECHNOLOGY CO.,LTD

PROJECT NO: 9501
 DRG NO: 9501-1-012
 SCALE: 1:1 UNITS: mm