




QX076

**DIMENSION:**

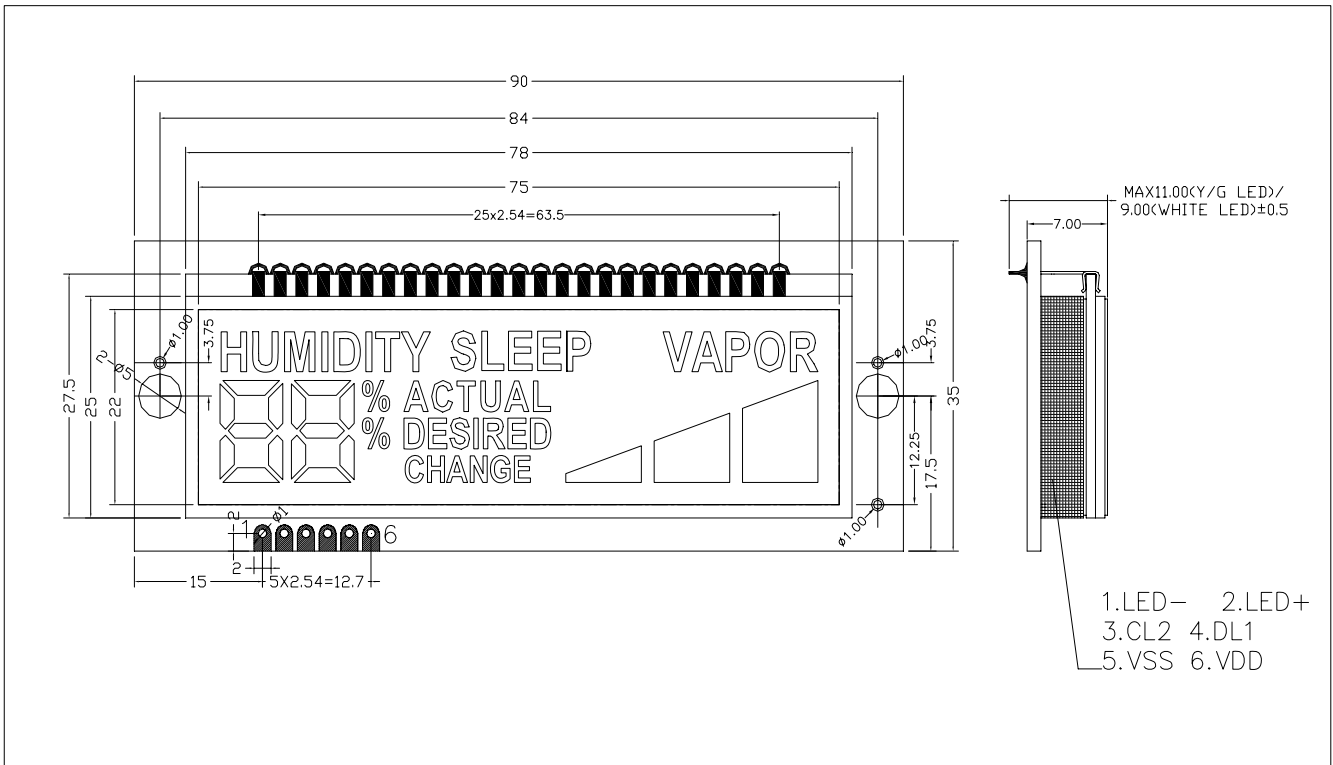

**FEATURE:**

1. DISPLAY TYPE :TN, NEGATIVE
- 2.VIEW DIRECTION: 12 O`CLOCK
3. POLARIZER MODE: TRANSMISSIVE
4. GLASS THICKNESS :1.1
5. DRIVER METHOD : 1/1 DUTY
6. OPERATING VOL TAGE : 5.0 V
7. OPERATING TEMPERATURE : 0C TO 50C
- 8.STORAGE TEMPERATURE: -10C TO 60C

**ELECTRICAL CHARACTERISTIC:**

| Item                   | Symbol | Standard Value |     |          | Unit |
|------------------------|--------|----------------|-----|----------|------|
|                        |        | Min            | Typ | Max      |      |
| Operating Voltage      | VDD    | -0.3           | —   | 7.0      | V    |
| Supply Voltage         | VEE    | VDD-13.5V      | —   | VDD+0.3V | V    |
| Input voltage 1        | Vin1   | -0.3V          | —   | VDD+0.3V | V    |
| Input voltage 2(V1-V6) | Vin2   | VDD+0.3V       | —   | VEE-0.3V | V    |
| Operating temperature  | Top    | 0              | —   | 50       | °C   |
| Storage temperature    | Tstg   | -10            | —   | 60       | °C   |

**BLOCK DIAGRAM:**

